



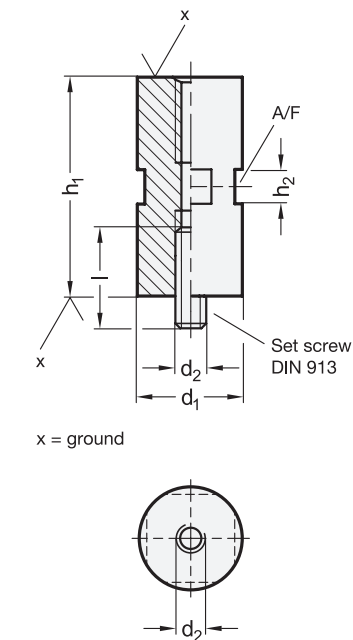

Application example

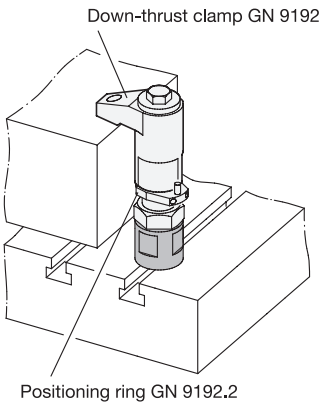

Metric table

1 d_1 -0.1	2 d_2	3 $h_1 \pm 0.01$	h_2	Length l	A/F
25 0.984	M 8	20 0.7874	10 0.39	20 0.79	22 0.87
25 0.984	M 8	40 1.5748	20 0.79	25 0.98	36 1.42
40 1.575	M 12	35 1.3780	20 0.79	30 1.18	36 1.42
40 1.575	M 12	70 2.7559	20 0.79	35 1.38	36 1.42

Specification

Height adjusting cylinder

- Steel
- Case-hardened
 - Blackened finish

Set screw DIN 913

Steel, blackened finish

RoHS

Height adjusting cylinders GN 9192.3 are used to increase the clamping height of down-thrust clamps GN 9192.

Height adjusting cylinders can also be used in combination with positioning elements and clamping pads to position contact points at a greater distance from the reference surface.

see also...	Page
GN 9192 Down-Thrust Clamps	QVX
GN 9192.2 Positioning Ring	QVX
GN 709.1 Clamping Pads	QVX
GN 709.3 Clamping Pads	QVX
GN 408.1 Positioning and Supporting Elements	QVX
GN 409.1 Positioning Elements	QVX